



FOUNDRY SOLUTIONS

Electroplated Diamond Wheels for Ductile and Gray Iron Grinding

DIAFORZTM
The Power of Diamond




Environmental, Health and Safety:

The use of grinding tools has historically been accompanied with hazards during their use in iron foundries.

Engis DiaForz diamond wheels provide relief from operator injury, respiratory exposure, and operator fatigue.

Used on robots and hand grinders, Engis diamond wheels are lightweight, free from hazardous discharge, and reduce the highest rate of wheel breakage in the industry.

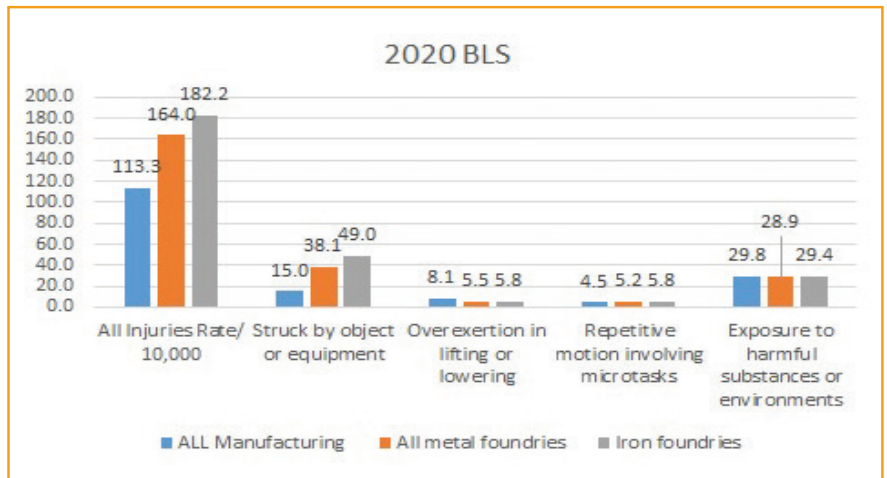


EHS Benefits:

Health and Safety:

- Reduces 99% of operator risk of injury and lost time
- Eliminates breakage risk from abuse or over-speeding
- Eliminates respiratory hazard of discharge
- Contributes to a clean workspace
- Lighter weight provides better ergonomics and less fatigue


Environmental:

- No particulate discharge from the wheels
- 100% inert material
- Eco-friendly disposal impact
- Reduces dust collection tonnage – up to 150# per wheel

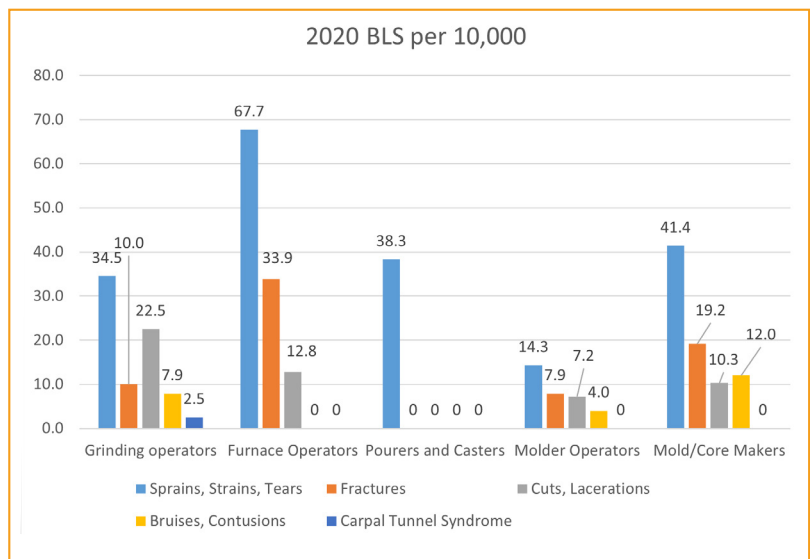

Post-Processing of Castings:

The cost of post-processing iron castings can amount up to 45% of the total casting manufacturing cost. To remain competitive, grinding and cut-off foundry operations must be as efficient and cost-effective as possible.

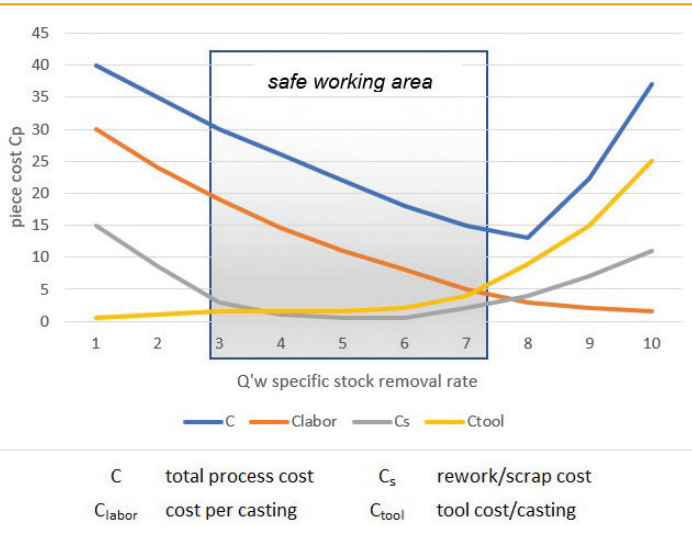

Over the past few years there have been large investments in the modernization and automation of the handling, molding, core production and smelting processes. These operations drive up to 80% of the post-processing cost; this cost can be mitigated by reducing or eliminating sources of error at these preceding production stages.

The next step in foundry operations is the reduction of labor and cleaning costs and increasing through-put in the cleaning and grinding operations.

Finding this optimized process is the job of Engis engineering.

Managing Costs:


The goal of post-processing is to remove unwanted material from the casting in the most efficient manner. The factor determining the rate at which this is done is known as the Material Removal Rate (MRR). This is accomplished by managing the effects of the grinding parameters on the system.

Iron castings are produced by pouring molten ferrous alloy into a mold either by pressurized or unpressurized means.

The precision of the patterns and cores, combined with the quality of the molding process, can highly impact the amount and cost of cleaning the casting after pour.

The resultant casting will have seams, risers, gates, and other blemishes to clean.

Utilizing the power of diamond, Engis engineering has developed industry leading technical solutions to grind castings.

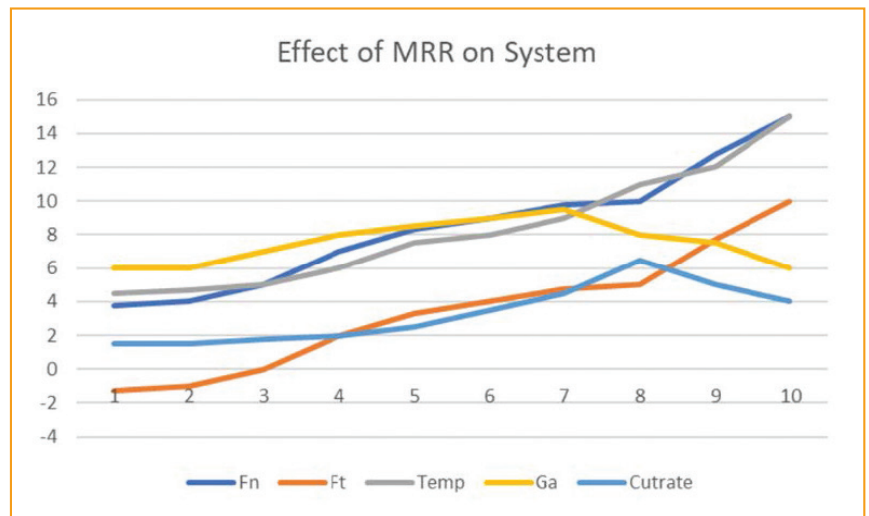

Cut-Off Grinding:

Cut-off grinding is the most widely used metal cutting process for the removal of gates and risers.


Equal or higher stock removal rates are achieved with cut-off grinding than with alternative machining processes such as turning.

Demands of cut-off grinding:

- High G-ratios
- Straight cuts
- Smooth cutting surface
- Short cut-off times
- Minimal wheel thickness
- No or minimal heat in the work piece
- High wheel peripheral speeds
- High level of safety



Standard Types for Hand Guided Cut-off Grinding:

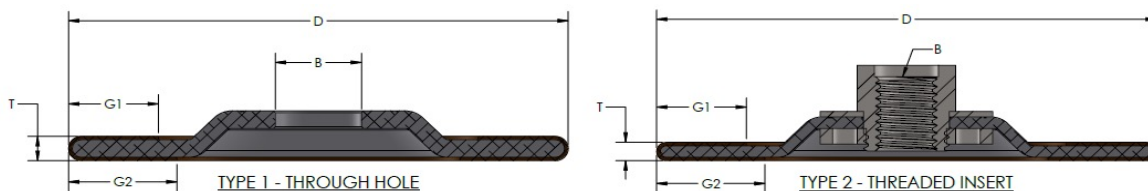

| Type Number | Size | Grit | Shape | Speed | Core | Weight |
|----------------|----------------------|-----------------------|-------|--------|--------|--------|
| | D x T x B | Full Wrap, both sides | | | Pounds | |
| T27S30-18-38TD | 3 x 1/8 x 3/8 | 30/40 | T27 | 18,080 | Steel | 0.31 |
| T27S40-18-58TD | 4 x 1/8 x 5/8 | 30/40 | T27 | 15,280 | Steel | 0.55 |
| T27A45-18-58CD | 4-1/2 x 1/8 x 5/8-11 | 20/30 | T27 | 13,580 | AL | 0.49 |
| T27A45-18-78TD | 4-1/2 x 1/8 x 7/8 | 20/30 | T27 | 13,580 | AL | 0.26 |
| T27A50-18-58CD | 5 x 1/8 x 5/8-11 | 20/30 | T27 | 13,580 | AL | 0.55 |
| T27A50-18-78TD | 5 x 1/8 x 7/8 | 20/30 | T27 | 13,580 | AL | 0.33 |
| T27A70-18-58CD | 7 x 1/8 x 5/8-11 | 20/30 | T27 | 8,600 | AL | 0.93 |
| T27A70-18-78TD | 7 x 1/8 x 7/8 | 20/30 | T27 | 8,600 | AL | 0.70 |
| T27A90-18-58CD | 9 x 1/8 x 5/8-11 | 20/30 | T27 | 6,600 | AL | 1.42 |
| T27A90-18-78TD | 9 x 1/8 x 7/8 | 20/30 | T27 | 6,600 | AL | 1.19 |

Horizontal Grinders – Cutting and Notching

| Type Number | Size | Grit | Shape | Speed | Core |
|-----------------|---------------|-------|-------|--------|-------|
| 1FF1S30-18-14TD | 3 x 1/8 x 3/8 | 30/40 | 1FF1 | 18,080 | Steel |
| 1FF1S30-18-38TD | 4 x 1/8 x 3/8 | 30/40 | 1FF1 | 15,280 | Steel |
| 1FF1S40-18-14TD | 4 x 1/8 x 1/4 | 30/40 | 1FF1 | 19,100 | Steel |
| 1FF1S40-18-38TD | 4 x 1/8 x 3/8 | 30/40 | 1FF1 | 19,100 | Steel |
| 1FF1S40-18-58TD | 4 x 1/8 x 5/8 | 30/40 | 1FF1 | 19,100 | Steel |

“Snagging” or Grinding Castings:

Snagging is the removal of flashes, burrs, gates, risers, and casting faults on the surface. These are holes in the casting skin, clusters, sand inclusion points and cracks or fissures. After cut-off grinding this is the second most prevalent form of grinding.

This encompasses the general means used by all foundries with either portable, stationary, or automatic “fettling” machines. The surfaces treated by snagging are usually flat or in some cases a “notch” or crevice.

Operator safety, fatigue and productivity are greatly impacted by the method and choice of grinding wheel used.

What demands are made of a snagging wheel

- High G-ratio
- Good surface
- Good cut rate (free cutting)
- No or minimal heating of the work piece
- Good edge stability
- High level of safety



Standard Types for Hand Guided Snag Grinding:

| Type Number | Size | Grit | Shape | Speed | Core | Weight |
|----------------|----------------------|-------|-------|--------|------|--------|
| T27A30-14-38TD | 3 x 1/4 x 3/8 | 30/40 | T27 | 18,080 | AL | 0.15 |
| T27A40-14-58TD | 4 x 1/4 x 5/8 | 30/40 | T27 | 15,280 | AL | 0.27 |
| T27A45-14-58CD | 4-1/2 x 1/4 x 5/8-11 | 20/30 | T27 | 13,580 | AL | 0.59 |
| T27A45-14-78TD | 4-1/2 x 1/4 x 7/8 | 20/30 | T27 | 13,580 | AL | 0.36 |
| T27A50-14-58CD | 5 x 1/4 x 5/8-11 | 20/30 | T27 | 13,580 | AL | 0.69 |
| T27A50-14-78TD | 5 x 1/4 x 7/8 | 20/30 | T27 | 13,580 | AL | 0.46 |
| T27A70-14-58CD | 7 x 1/4 x 5/8-11 | 20/30 | T27 | 8,600 | AL | 1.18 |
| T27A70-14-78TD | 7 x 1/4 x 7/8 | 20/30 | T27 | 8,600 | AL | 0.95 |
| T27A90-14-58CD | 9 x 1/4 x 5/8-11 | 20/30 | T27 | 6,600 | AL | 1.82 |
| T27A90-14-78TD | 9 x 1/4 x 7/8 | 20/30 | T27 | 6,600 | AL | 1.59 |

Portable Grinding of Castings:

Portable grinding is also considered snagging, but inclusive of a wider variety of methods and tools.


This includes the processes used by all foundries to clean cavities, seams, blemishes (cosmetic defects), and otherwise “non-flat” areas of the casting (shoulders, bores, radius, and hard to reach areas).

Angle grinders, straight grinders (in-line grinders) and flexible shafts:


- Mounted points
- Tungsten carbide burs
- Shape 1
- Cup wheels (Shape 11 and Shape 6)




| Type Number | Size | Shape | Grit | Speed | Core |
|-----------------|---------------------|-------|-------|--------|-------|
| HS48486-1 | 6 x 2 x 5/8-11 | T11 | 20/30 | 7,260 | AL |
| T11A60-20-58CD | 6 x 2-1/16 x 5/8-11 | T11 | 20/30 | 7,260 | AL |
| 1FF1S20-14-38TD | 2 x 1/4 x 3/8 | 1FF1 | 30/40 | 25,465 | Steel |
| 1FF1S30-14-38TD | 3 x 1/4 x 3/8 | 1FF1 | 30/40 | 20,370 | Steel |
| 1FF1S40-14-38TD | 4 x 1/4 x 3/8 | 1FF1 | 30/40 | 15,280 | Steel |

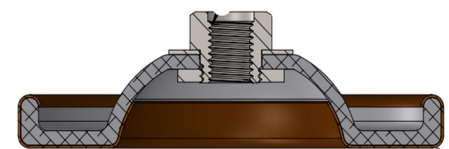

HS48486-1

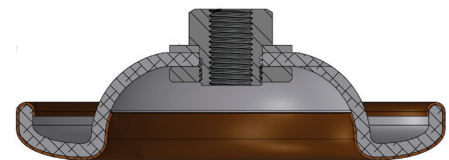

T11A60-20-58CD

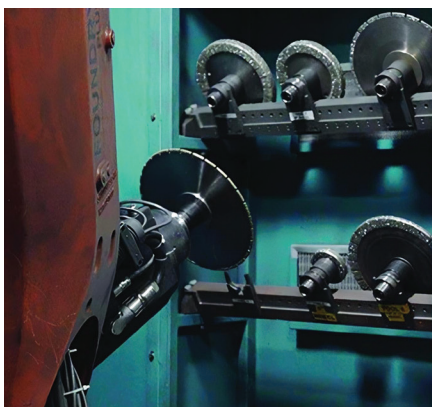

Automatic Grinding:


Although automatic grinding can take many formats due to the wide number of manufacturers making equipment, we see mainly three types of systems.

- Grinding with a robotic arm containing a grinding spindle brings the wheel to the workpiece. Some of these systems will have a tool changer allowing for the machine to change the wheel type during the cycle. (Often performed on larger or smaller castings fixtured with multiple castings in a single cycle.)
- A robotic arm brings the casting to a stationary grinding wheel. (These will usually be smaller castings).
- A moving fixture brings the casting to a semi-stationary spindle holding the grinding wheel. (These are typically larger castings).

De-Burring Tools



DiaForz diamond plated burrs for hand grinding operations offer significant advantages over standard solid carbide burrs for foundry applications. Not only do they cut faster, but they can last up to five times longer than carbide burrs....this means a lower overall cost to your foundry.

1/4" Shanks

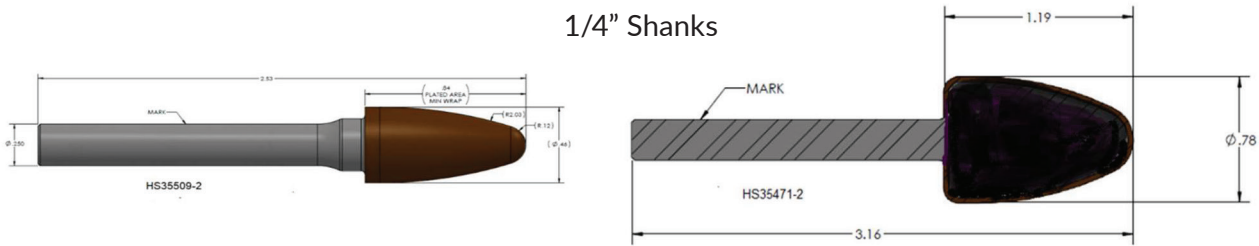

| Type Number | Size | Shape | Grit | Speed | Core | Weight |
|-------------|------------------------------|-------|-------|--------|------|--------|
| HS35509-2 | .390 x 0.800 x .250 | Burr | 20/30 | 18,000 | ST | 0.10 |
| HS35471-2 | .715 x 1.125 x .250 | Burr | 20/30 | 18,000 | ST | 0.12 |
| HS35367-2 | .670 x 1.400 x .375 | Burr | 20/30 | 20,000 | ST | 0.15 |
| HS35366-2 | .730 x 1.500 x .375 | Burr | 20/30 | 20,000 | ST | 0.18 |
| HS35470-2 | 1.100 x 2.000 x .3" x 5/8-11 | Cone | 20/30 | 18,000 | ST | 0.60 |

3/8" Shanks

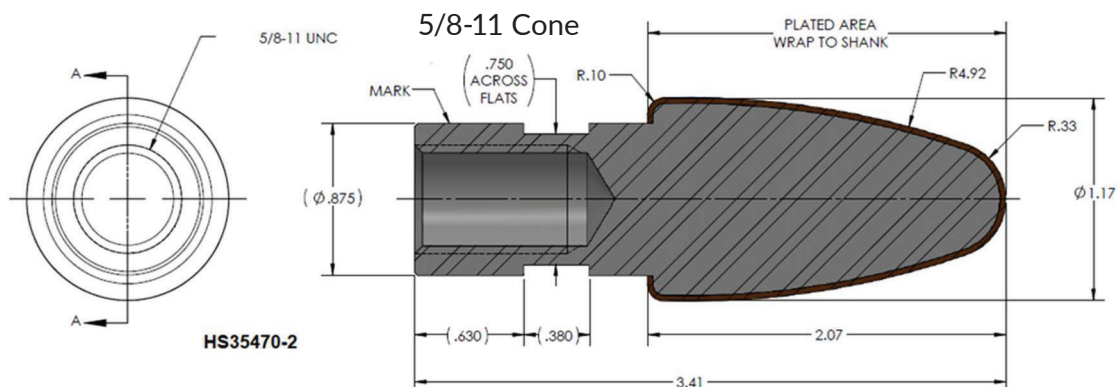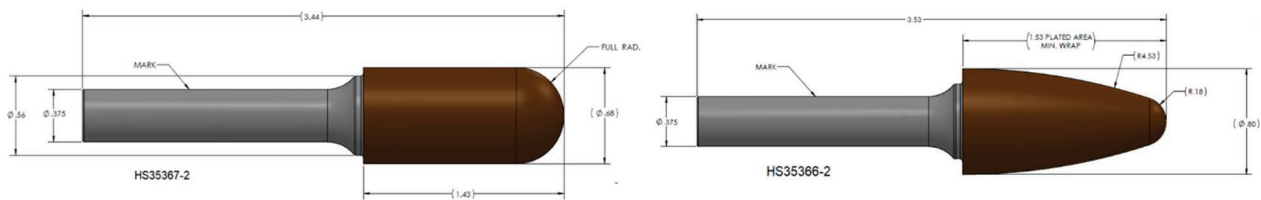

Methods:

Many methods are used to post-treat castings. Each method will have a varied effectiveness and associated cost depending on the casting metallurgy and the process required.

Comparison of these methods:

| | Gray Iron (GG) | Ductile Cast Iron | Malleable Cast Iron | Chilled Cast Iron |
|---|--|---|---|--|
| | The most common engineering alloy because of its relatively low cost and good machinability. | Ductile (spheroidal) iron, also called nodular iron, is a material with good moldability and is very ductile. | Designation "GTS" "GTW" are malleable cast irons that are ductile when cold and are rust resistant. | Castings which have to remain hard throughout are produced from chilled cast iron. |
| Cut-Off Grinding | Widely used - Cost effective | Widely used - Cost effective | Widely used - Cost effective | Very good - Cost effective |
| <i>Can achieve many cuts per hour on gates, risers and large cross sections</i> | | | | |
| Sawing | Good for large cross-sections | Good for large cross-sections | Not used - Expensive | High cost method |
| <i>Best on larger work pieces but is inefficient with high number of cuts</i> | | | | |
| Milling | Good for large cross-sections | Good for large cross-sections | Not used - Expensive | High cost method |
| <i>Best for heavy stock from flat surfaces but has high tool costs</i> | | | | |
| Shearing | Not typical - Expensive | Not typical - Expensive | Not typical - Expensive | Not typical - Expensive |
| <i>Typically only used on large volume runs</i> | | | | |
| Snagging | Widely used - Cost effective | Small cross sections - Cost effective | Widely used - Cost effective | Small cross sections - Cost effective |
| <i>Typically used on small cross sections with best results on brittle material</i> | | | | |
| Flame Cutting | Not typical - Expensive | Not typical - Expensive | Not typical - Expensive | Not used |
| <i>Used in difficult to access areas but has a high cost and possible casting surface quality risks</i> | | | | |

THE ENGIS® GROUP OF COMPANIES



World Leaders in Superabrasive Finishing Systems

ENGIS CORPORATION

105 W. Hintz Road • Wheeling, IL 60090-6038
 Phone: 847.808.9400 • Toll Free: 1.800.99.ENGIS
 Fax: 847.808.9430 • E-mail: info@engis.com
 Website: www.engis.com

ISO9001
 CERTIFIED QUALITY
 MANAGEMENT SYSTEM

Engis is a registered trademark of Engis Corporation U.S.A. and other countries.
 All products designated with ® or ™ are registered Trademarks or Trademarks of Engis Corporation.